


TAPE FOR BEND-TEMP. EQUIP & OVENS. VENT

NEW PRODUCT !

Type: G.M.C. TAPE® 123.5MA - 252.4MA
Composition: 60 % stainless steel fibers – 40 % aramid fibers
Use : . to cover the bending & tempering section conveying rolls
. to cover the rollers of ovens for laminated glass pre assembling

Sizes : 12 x 3.5 - 25 x 2.4 mm, other sizes available on request
Fixation method: included with supply

Delivery time: 4 weeks
Price EXW:€

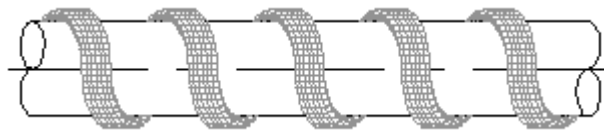

NOUVEAU PRODUIT !

Type: G.M.C. TAPE® 123.5MA - 252.4MA
Composition: 60 % fibres d'acier inoxydable – 40 % fibres d'aramide

Utilisation : . pour recouvrir les rouleaux de section combinée de bombage et trempe
. pour recouvrir les rouleaux de four d'assemblage de verre feuilleté

Dimensions: 12 x 3.5 - 25 x 2.4 mm, autres dimensions sur demande
Méthode de collage: remise avec la fourniture

Délai: 4 semaines
Prix EXW:€

You are daily using glass processing equipments, you are very concerned by this information letter. Specialized in the field of glass toughening and other glass process over 30 years, we have developed two basic items which might interest you in order to maintain well your horizontal bending & tempering equipment and laminating glass oven to insure a good glass surface quality, at the lower cost.

G.M.C.For Glass Industry
France, ☎ 33(0)4 72 50 52 55 fax 33(0)4 72 50 51 13 Email: gmc@gmcforglass.fr

